

INSTALLATION INSTRUCTIONS

Basin and Sink Mixers




Congratulations on your purchase of Marbletrend tapware, we are confident that this quality product will serve you reliably for many years.

These instructions apply to the following products:

Model	Code	Taphole diameter mm	Max bench thickness mm
Madeira Basin Mixer	MTM121	35	45
Madeira Tall Basin Mixer	MTM223	35	45
Madeira Sink Mixer Curved Form	MTM403	35	43
Madeira Sink Mixer Square Form	MTM423	35	40
Sardina Basin Mixer	MTS121	35	45
Sardina Tall Basin Mixer	MTS223	35	45
Sardina Sink Mixer Curved Form	MTS403	35	43
Sardina Sink Mixer Square Form	MTS423	35	40

Component diagram

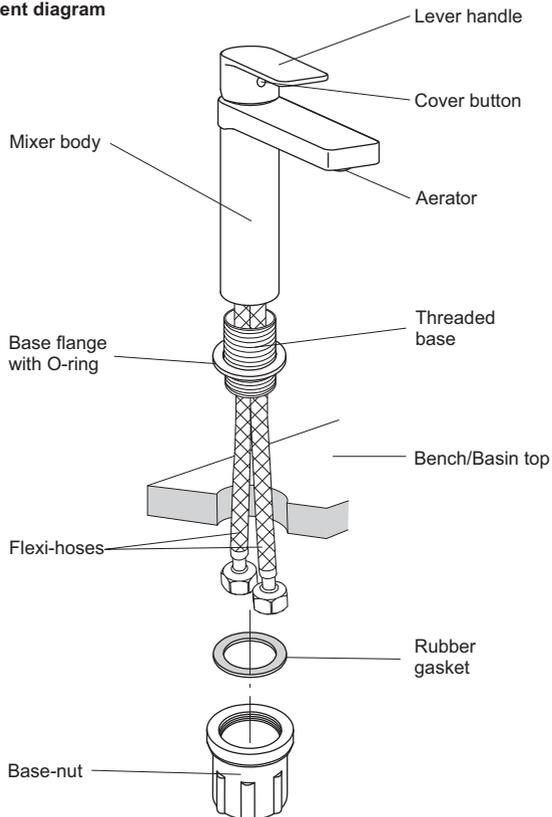

Installation procedure

1. Check installation position and bench or basin thickness prior to starting
2. If necessary drill a 35mm diameter hole in the benchtop for the mixer body
3. On some models the flexi-hoses must be fitted to the mixer body before installation. In this case the threaded base, base flange, rubber gasket and base-nut will also be packed separately. Before fitting the flexi-hoses insert the male end of the hoses through the threaded base and the base flange and O-ring then tighten the flexi-hoses by hand ensuring that the rubber O-ring seal is compressed.
4. Fit the base flange with O-ring onto the mixer body
5. Insert the flexi-hose tails and threaded base section through the fitting hole
6. Fit the rubber gasket and screw up the base nut to tighten the assembly
7. Flush the hot and cold supply pipes to remove any construction debris
8. Attach the hot and cold flexi-hoses to their respective connections
9. Turn the water supplies on and check for leaks and tap operation.

Care and maintenance

Occasional cleaning with a soft cloth and warm soapy water is all that is needed to keep your tapware in good condition. **Do not use harsh or abrasive cleaning agents.**

Depending upon local water quality the aerator may need occasional cleaning. Simply unscrew the aerator using a broad-bladed screwdriver and clean by rinsing in fresh water.

Should it become necessary to change the ceramic cartridge this can be done by first removing the chrome cover-button and then inserting a 2.5mm allen key to loosen the internal grub screw - the lever handle can then be removed giving access to the cartridge assembly. Both the hot and cold water supplies must be turned off before doing this.

Operating conditions:

Pressure 0.05-1.0 Mpa
Temperature 4 - 90°C

WARRANTY

This tapware carries a Product Replacement warranty against defects that appear within a period of 5 years and a Parts and Labour warranty for a 2 year period. The Warranty commences from the date of purchase.

In Australia, consumers are protected from the consequences of faulty or defective products by the Australia Competition and Consumer Act. Products must be fit for purpose and free from material and manufacturing defects.

Please go to www.marbletrend.com.au for full warranty terms and conditions.



CONTACT
Tel 1300 717 717
warranty@johnsonsuisse.com.au
www.marbletrend.com.au