

INSTALLATION INSTRUCTIONS

Basin Sets




Congratulations on your purchase of Marbletrend tapware, we are confident that this quality product will serve you reliably for many years.

These instructions apply to the following products:

Model	Code	Centre hole diameter mm	Outer hole diameters mm	Max bench thickness mm
Madeira Basin Set	MTM313	35	30	35
Sardina Basin Set	MTS313	35	30	35

Component Diagram

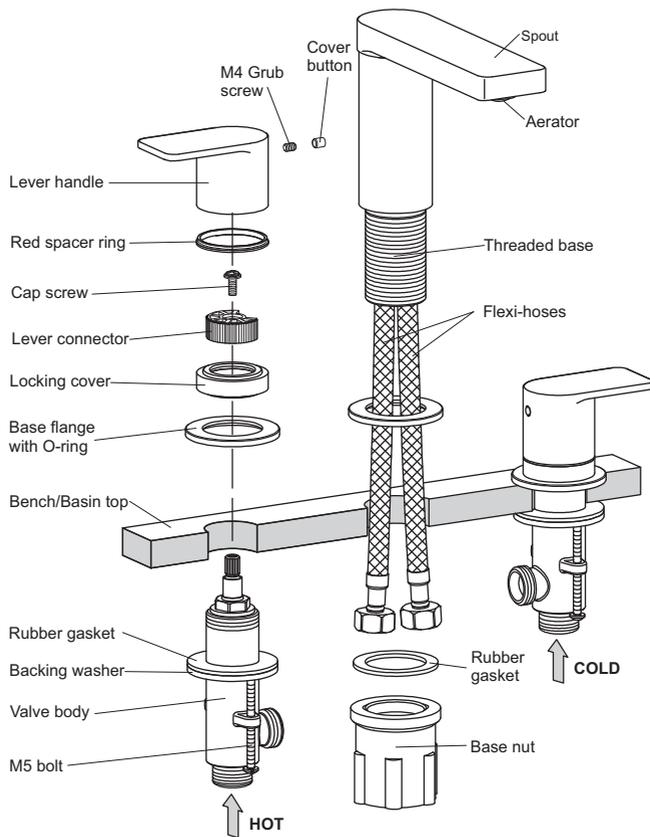


Operating conditions:
 Pressure 0.05-1.0 Mpa
 Temperature 4 - 90°C

INSTALLATION INSTRUCTIONS

Basin Sets



Dimension Drawing

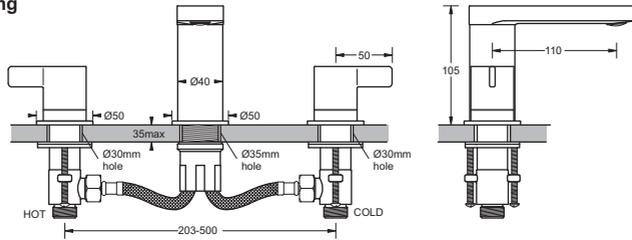

Installation procedure

1. Check installation position, hole size and bench or basin thickness prior to starting. Note that the HOT supply is on the left and COLD supply on the right.
2. A 35mm diameter hole is required for the spout body and 30mm holes for the taps.
3. For each tap assembly:
 - Unscrew the M5 bolts to roughly fit the thickness of the bench top
 - Loosen the M4 grub screw and remove the lever handle and the red/blue spacer ring
 - Unscrew the cap screw and remove the lever connector, locking cover and base flange with O-ring
 - Insert the tap assembly through the tap hole from the bottom. The 1/2" male thread should face toward the centre hole
 - Fit the base flange and screw on the locking cover. Tighten the M5 bolts from the underside.
 - The coloured spacer and lever assembly can now be refitted.
 - Repeat for the other tap.
4. Fit the spout assembly and tighten the base nut firmly
5. Attach the flexi-hose tails to the 1/2" male fittings on the valve body
6. Flush the hot and cold supply pipes to remove any construction debris
7. Connect the hot and cold water supplies to their respective connections
8. Turn on the water supplies and check for leaks and tap operation.

Care and maintenance

Occasional cleaning with a soft cloth and warm soapy water is all that is needed to keep your tapware in good condition. **Do not use harsh or abrasive cleaning agents.**

Depending upon local water quality the aerator may need occasional cleaning. Simply unscrew the aerator using a broad-bladed screwdriver and clean by rinsing in fresh water.

Should it become necessary to change the ceramic cartridge this can be done by first removing the chrome cover-button and then inserting a 2.5mm allen key to loosen the internal grub screw - the lever handle can then be removed giving access to the cartridge assembly. Both the hot and cold water supplies must be turned off before doing this.

WARRANTY

This tapware carries a Product Replacement warranty against defects that appear within a period of 5 years and a Parts and Labour warranty for a 2 year period. The Warranty commences from the date of purchase.

In Australia, consumers are protected from the consequences of faulty or defective products by the Australia Competition and Consumer Act. Products must be fit for purpose and free from material and manufacturing defects.

Please go to www.marbletrend.com.au for full warranty terms and conditions.



CONTACT

Tel 1300 717 717
warranty@johnsonsuisse.com.au
www.marbletrend.com.au